
exclusive

SOURCE ONE

cambridge/cambridge solid

TYPE II WALLCOVERING



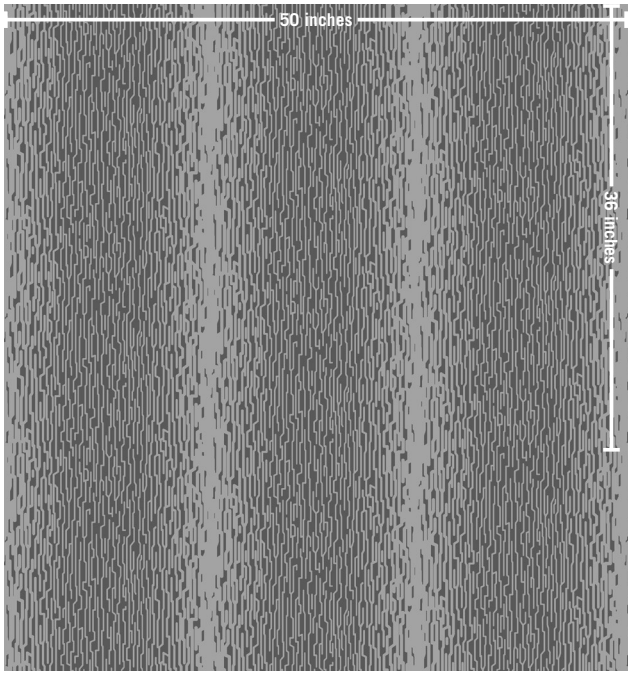

TYPE II High durability, Fed. Spec. CCC-W-408D

WEIGHT 20 oz/ly (620 g/lm)

WIDTH Cambridge: 50" (127 cm);
Cambridge Solid: 54" (137 cm)

CONTENTS 100% vinyl

BACKING Osnaburg

PATTERN MATCH Cambridge: Non-reverse hang, 50" (127 cm) horizontal repeat, 36" (91.5 cm) vertical repeat, straight across match;
Cambridge Solid: Reverse hang, random match

FIRE TEST ASTM E-84 Tunnel Test: Class A, flame spread 5, smoke developed 35 (test procedure is comparable to ANSI/UL 723, NFPA 255 and UBC 8-1)

CAN/ULC S102 Tunnel Test: flame spread 5, smoke developed 20

NFPA 286 Corner Burn Test: meets requirements for flame spread, smoke developed and flashover

CONSTRUCTION WASTE MANAGEMENT Recyclable through reclamation

MICROVENTING AVAILABLE This product can be microvented with the Duravent process for breathability. You may specify this as an added feature.

ADDITIONAL PRODUCT ATTRIBUTES
Antimicrobial additives
Cadmium and mercury free
Contains no heavy metals
Does not contain DEHP plasticizers
Free of PBDE's (Brominated Flame Retardants)
Manufacturing materials recovery and reuse program
Solvent-based inks

SPECIAL NOTE Additional solid colors available in Versa's Fabrications pattern

CUSTOM COLORS AVAILABLE 60 linear yard (55 meter) minimum

WARRANTY Product is guaranteed to be free of defects in workmanship and material for five years

PRODUCT USE ADVISORY This product is intended for use in buildings designed, monitored and regularly maintained to avoid moisture accumulation on or within walls, particularly in warm, humid climates. The features that make vinyl wallcovering cleanable and durable also render it low in permeability. Vinyl wallcovering should not be installed on walls that contain excessive moisture or are subject to moisture infiltration.

CROWN
WALLPAPER & FABRICS
Toll free 1.800.268.1300
Sans frais 1.800.361.7881
crownwallpaper.com

© 2014 Wall Source LLC