



zintra[®]

PATTERNS PANELS Technical Specifications

Zintra Patterns Vanishing in Sunshine on Tar Backer



Zintra Patterns offer virtually unlimited style options to walls, dividers and ceilings. Patterns can also be paired with a solid Zintra backing panel to add even more colour, depth and texture while increasing the NRC value.

Zintra Patterns Shard in Frost on Sunshine Backer

zintra® .2


INSTALLATION IDEAS






Top image: Zintra Patterns Custom in Slate
Bottom image: Zintra Patterns Foliage in Chambray on Linen Backer


TECHNICAL DRAWINGS

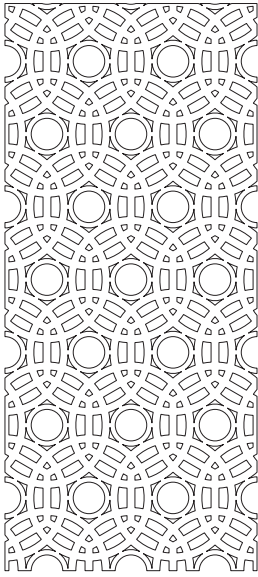


ABHAYA

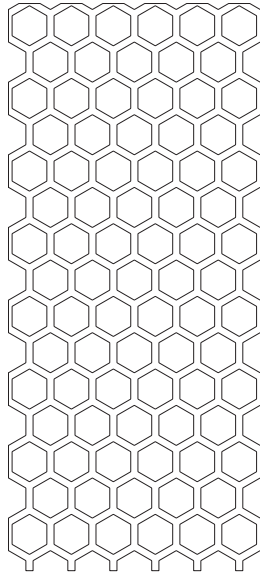


ASIATIC

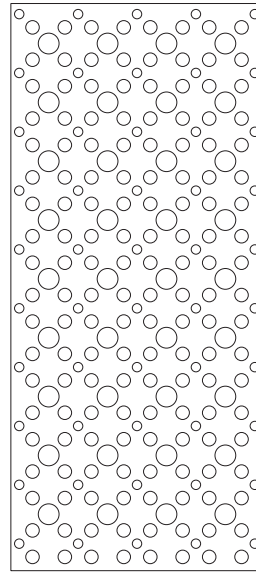


ASTRA

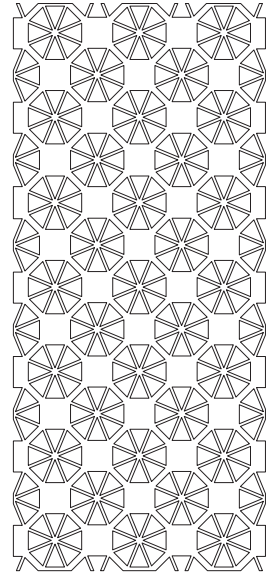


BENGAL

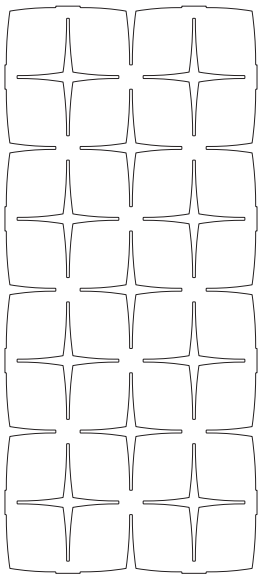


DEVRAJ

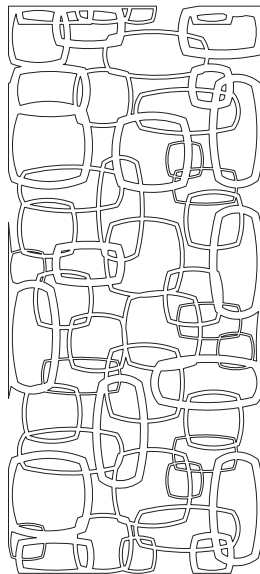


ELEPHANTA

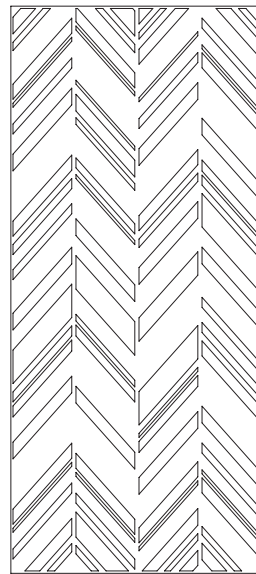


FISHBONE

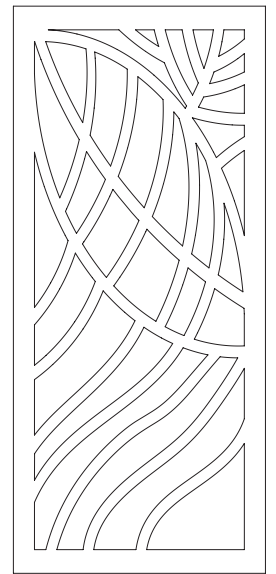

FOLIAGE

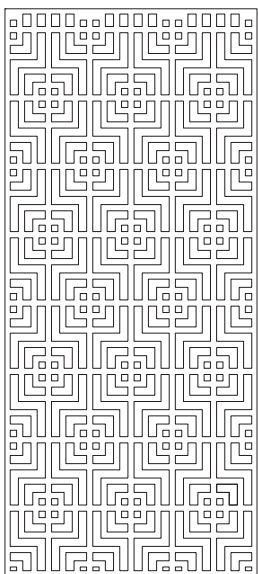


INDUS

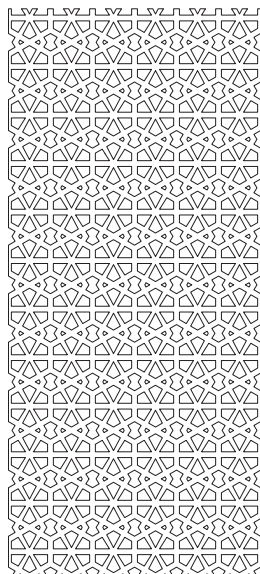


KALI




KERALA

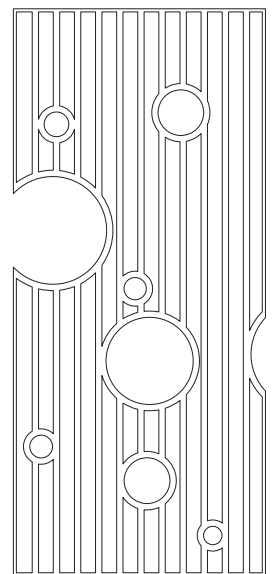


KRISHNAN

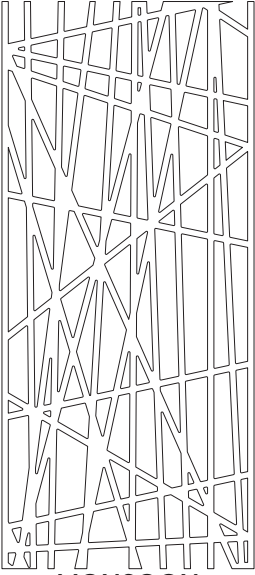


MONSOON

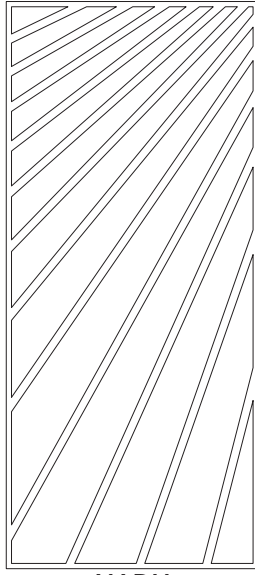


NADU

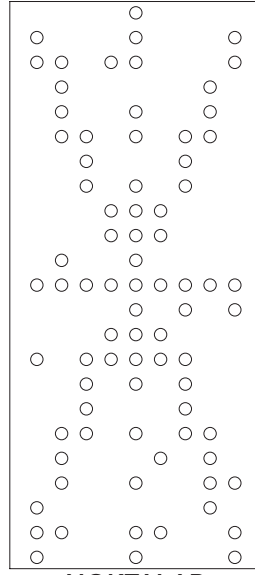


NOKTALAR

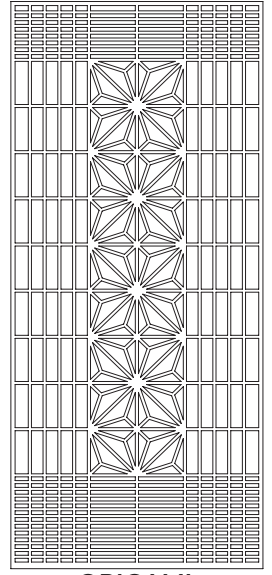


ORIGAMI

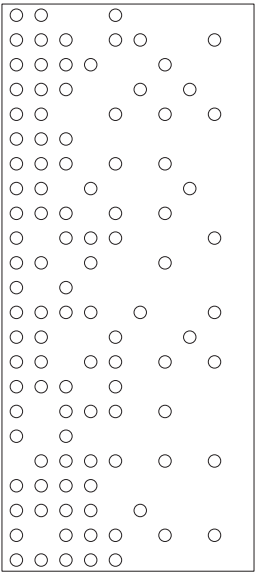


PUNTO

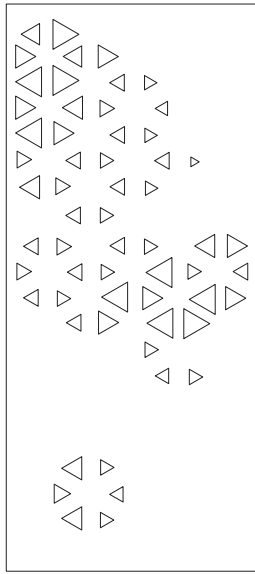


PROSE

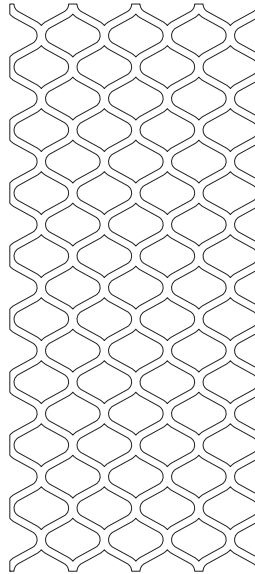


RAJA

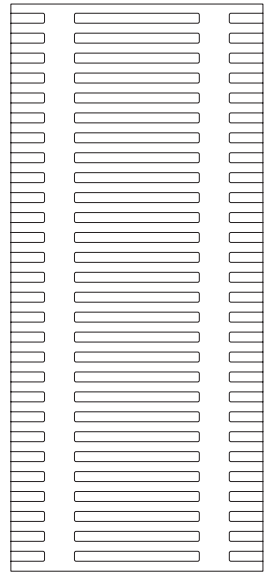


SAKRA

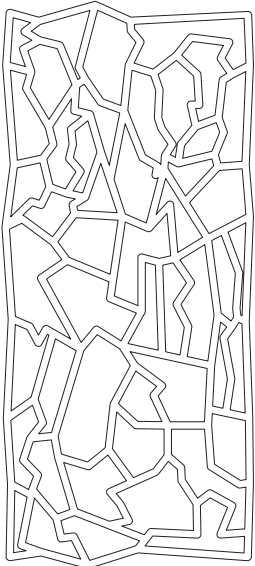


SIPTICAL

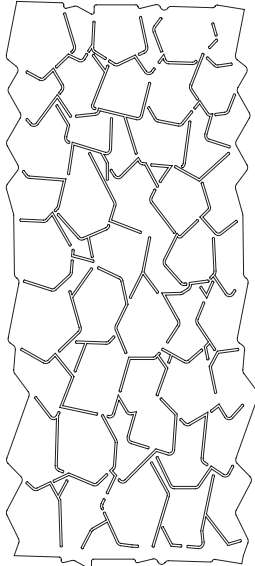


STONE AGE

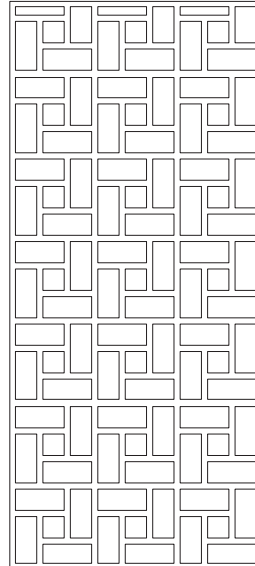


SUTRA

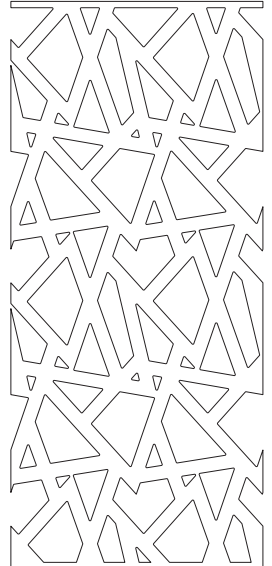


TELUGU

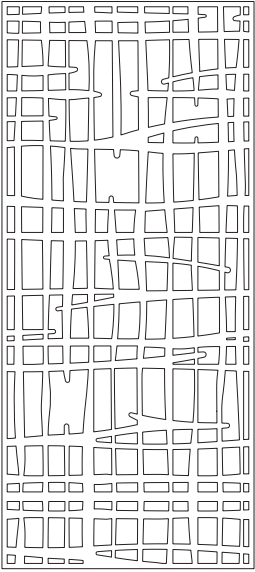


PADMESH

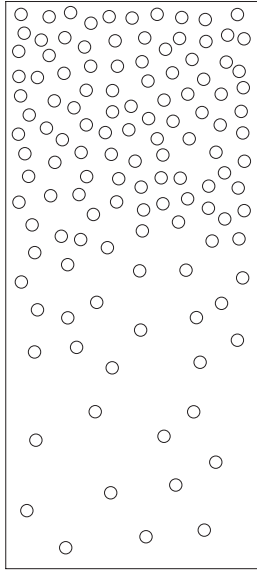


PERDITA

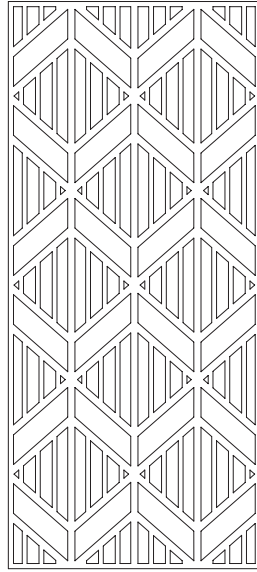


PIVOT

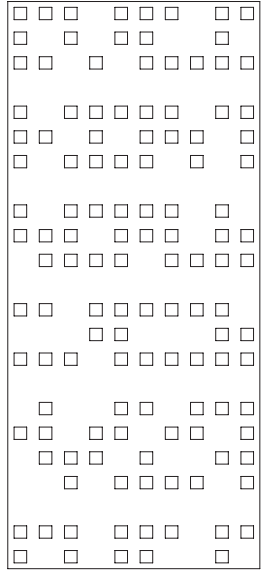


PIXEL

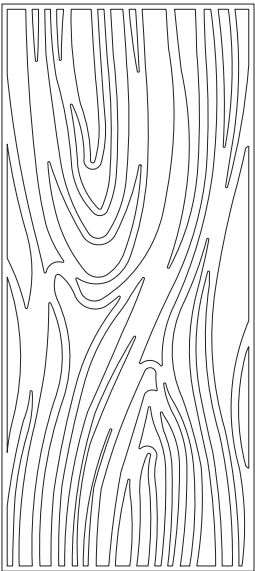


SANKARAN

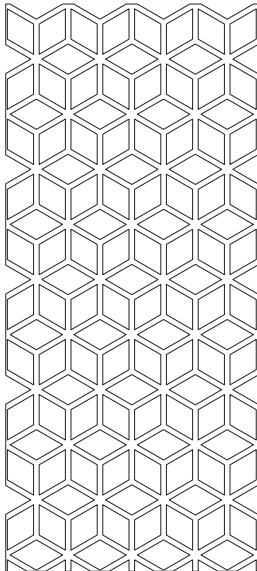


SANSKRIT

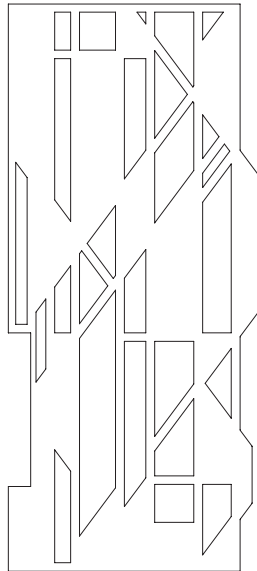


SETRO

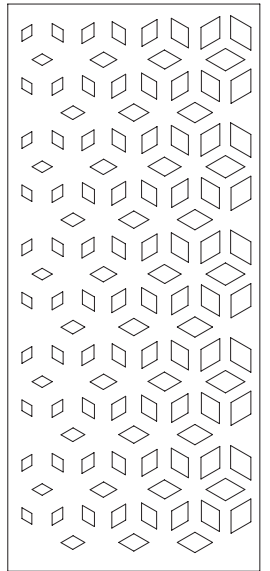


SHARD

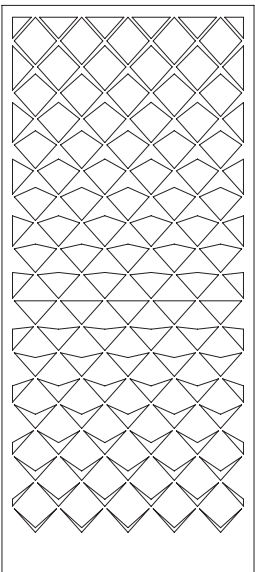

VANISHING

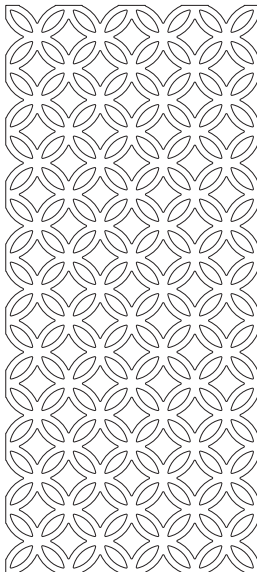

VEDIC

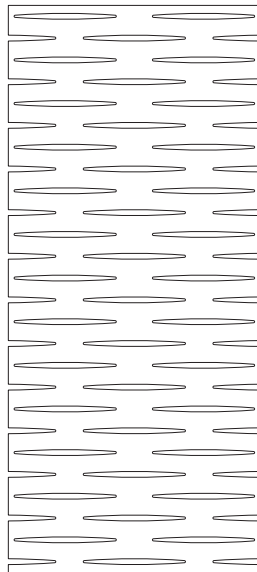

WAMIKA

TECHNICAL DETAILS


MATERIAL

100% solution-dyed polyester.

ACOUSTIC RATING

ASTM C423-09a test results: 0.45-0.90 NRC depending on distance from wall.

		Frequency/Hz																$\bar{\alpha}$	NRC	
DISTANCE FROM WALL		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000		
	0mm	0.03	0.01	0.09	0.04	0.05	0.09	0.12	0.25	0.32	0.49	0.61	0.72	0.82	0.85	0.91	0.94	0.95	0.44	0.45
	50mm	0.20	0.16	0.22	0.32	0.46	0.56	0.63	0.80	0.89	1.03	1.04	0.99	1.07	1.00	0.93	0.87	0.92	0.81	0.80
150mm	0.29	0.46	0.44	0.57	0.69	0.81	0.97	0.96	0.91	1.04	0.92	0.80	0.94	0.94	0.91	0.90	0.91	0.87	0.90	

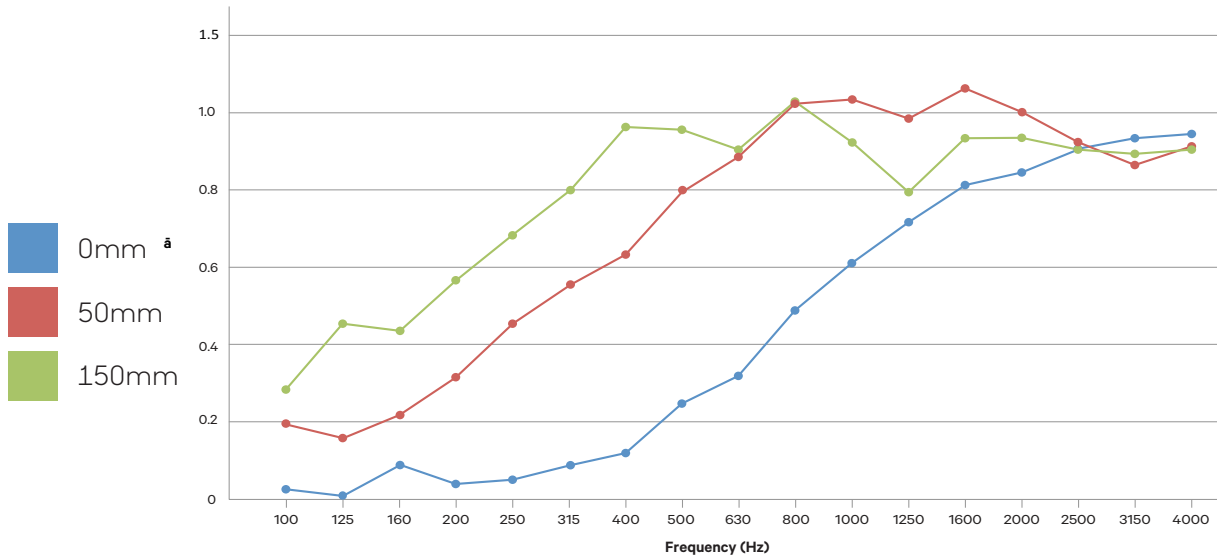

SIZE

48" [1220mm] w x 108" [2745mm] h x 1/2" [12mm] d
23.8" [603mm] w x 47.8" [1213mm] h x 1/2" [12mm] d
23.8" [603mm] w x 23.8" [603mm] h x 1/2" [12mm] d
Thickness tolerance +/- .02" (0.5mm)
Width and length tolerance +/- 1/8" (3mm)

SURFACE FINISH

Both sides "A" or "B" have a matt surface and are suitable to use as the face. To ensure consistency of look, it is recommended that the face surfaces are either all "A" or all "B" when installing side-by-side.

WEIGHT

0.5 lb / ft² / 2.4 kg / m²

APPLICATION

Indoor areas only.

FABRICATION

Utility knife and CNC with oscillating knife.

INSTALLATION

Zintra Patterns - choose from one of the hardware options or choose your own to install as a room divider, ceiling tile or wall / ceiling feature.

Zintra Patterns on Backer - adhere to substrate using contact adhesive or Liquid Nails. Panel can be mechanically fixed using details similar to glass fittings.

Go to crownsurfacesolutions.com for complete installation instructions.


COLOUR RANGE

24 sheet colours and 4 timber colours.

TIMBER COLOURS



PLAIN COLOURS

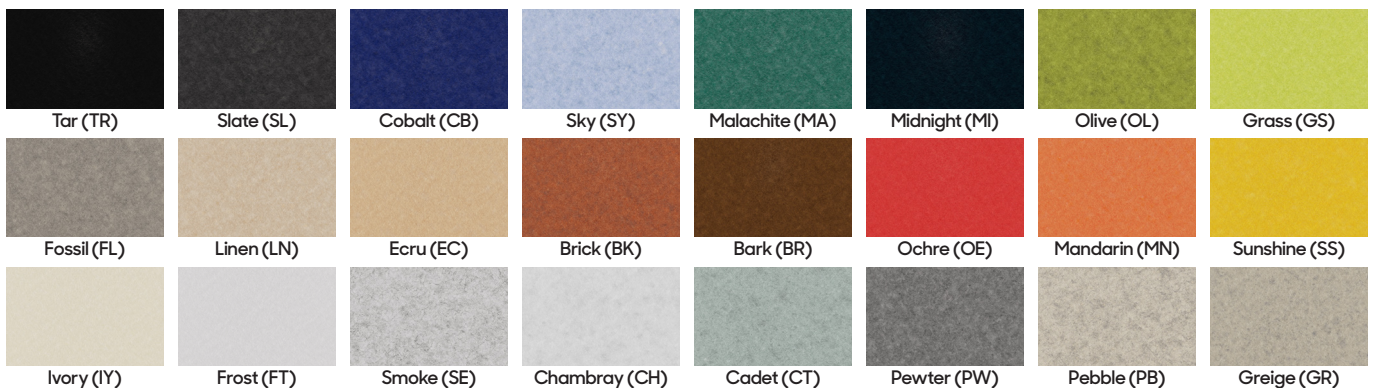

FIRE RATING

ASTM-E84 - Class A classification
AS ISO 9705 - 2003 - Group 1 classification
EN-13501 - B-s2-d0 classification.

Tested in accordance with CAN/ULC S102

LIGHTFASTNESS

AATCC 16.3, Option 3: Panel colour change at 40AFU is 4.5.

TEMPERATURE

Maximum temperature exposure is 240°F (115°C).

MOISTURE ABSORPTION

Polyester fibre when exposed to an atmosphere of 120°F (49°C) at 90% relative humidity for four days showed moisture absorption of less than 0.03% by weight.

VOC TESTING

Standard Method Version 1.2 for CDPH 01350:
PASS for all testing scenarios.

ENVIRONMENT

Panels are fully recyclable at end of life.

CARE INSTRUCTIONS

Vacuum to remove dust.

Remove spills immediately using a clean damp cloth or with soap and water.

Polyester carpet and fabric cleaners can be used - always test an inconspicuous area first.

A stain repellent coating is available for additional protection.

Disinfection - Regular household bleach solution (5.25% sodium hypochlorite) can be used in accordance with Health Canada Cleaning and Disinfection instructions. The solution ratio should be 10% bleach to 90% water. Spray apply the solution as a mist, follow recommended wet contact period and then wipe off the surface moisture.