
QUARTER BAFFLES INSTALL GUIDE

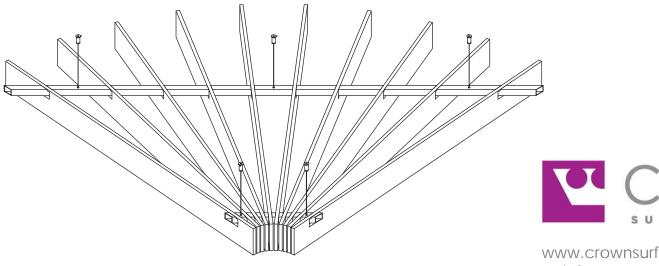


CROWN SURFACE SOLUTIONS


www.crownsurfacesolutions.com e: info@crownsurfacesolutions.com p: 416.245.2900

QUARTER BAFFLES ASSEMBLY

1) Thread baffles onto the square mounting beams provided.

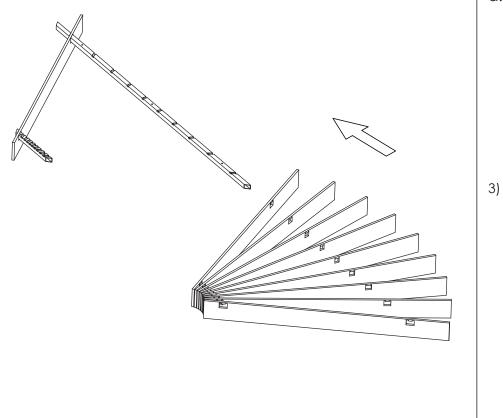


2) Lock each baffle into position by pushing downwards as shown.

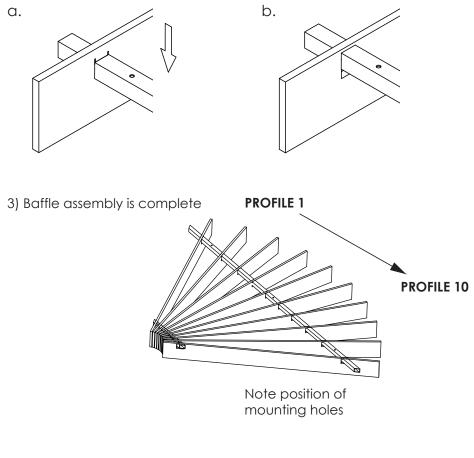




STEP 2 & 3

QUARTER BAFFLES SUSPENSION METHOD

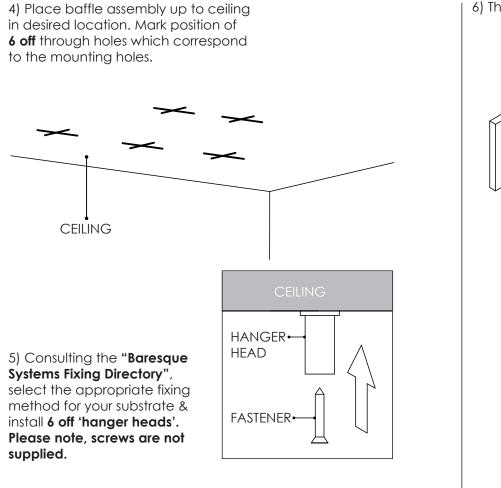


STEP 4 & 5

6) Thread wires through mounting holes in square mounting beams.

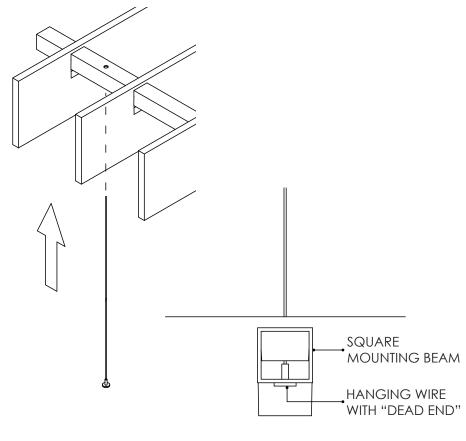



STEP 6

7) Feed top of wire through tip of 'wire adjuster' (as shown). Push button (shown in grey) to adjust wire length. Release the button to lock in place.

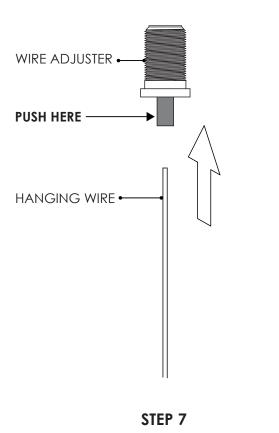

8) Feed wire through hole in the side of 'hanger head'. Screw 'wire adjuster' into 'hanger head'. When all wires are in place, adjust lengths so baffle assembly hangs level.

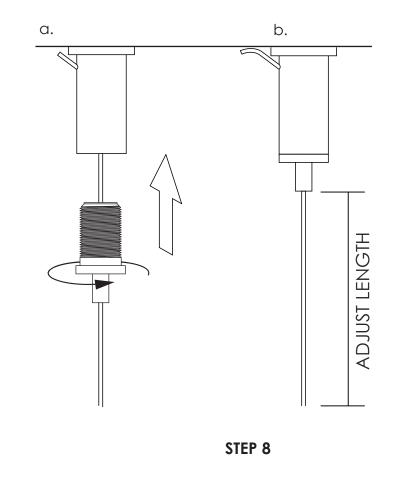

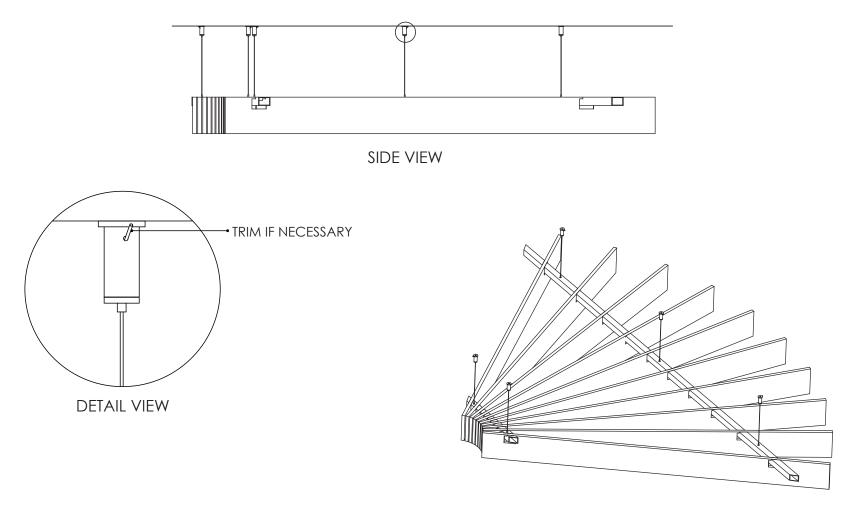


COMPLETED INSTALL

QUARTER BAFFLES CONNECTOR & CAPPING DETAIL


CONNECTOR DETAIL

To connect multiple baffle assemblies together, insert connectors into open ends of square mounting beams and push assemblies together as shown.

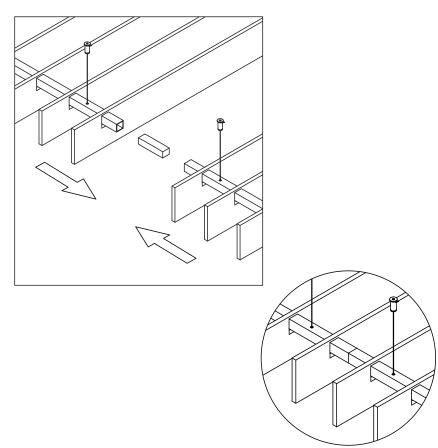


CAPPING DETAIL

To cap ends of baffle assembly-insert end caps provided as shown.

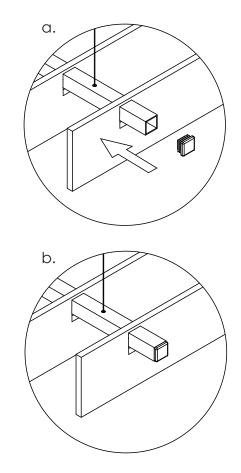

2x SQUARE MOUNTING BEAM one short and one long

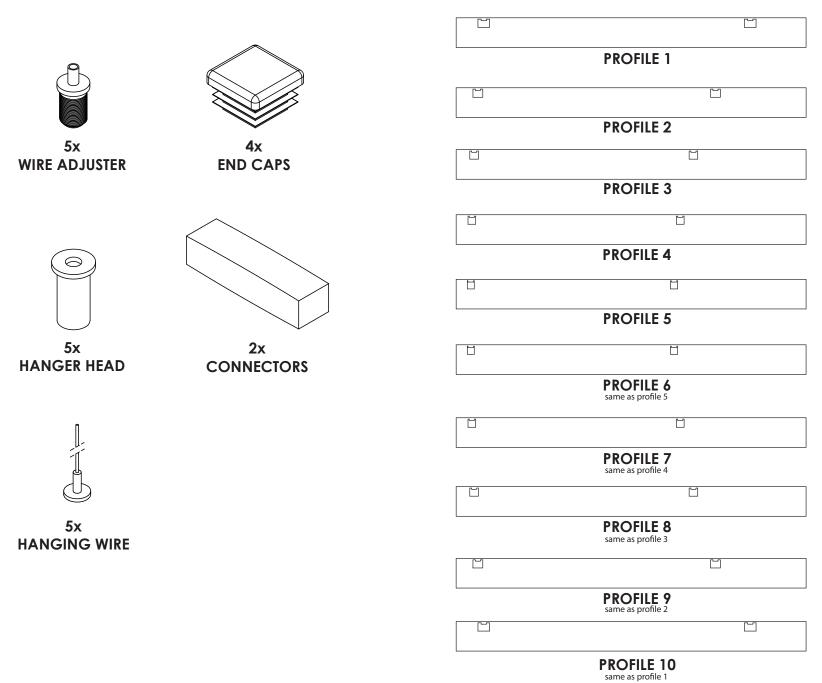

П

